

# MOTOBATT




## QuadFlex™ Battery


### MBTX9U



#### Terminal Dimensions (mm)

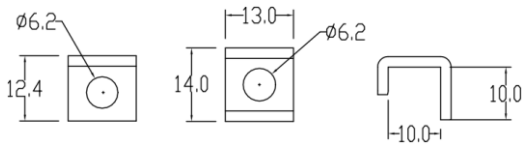

#### Physical Dimensions (in./mm)

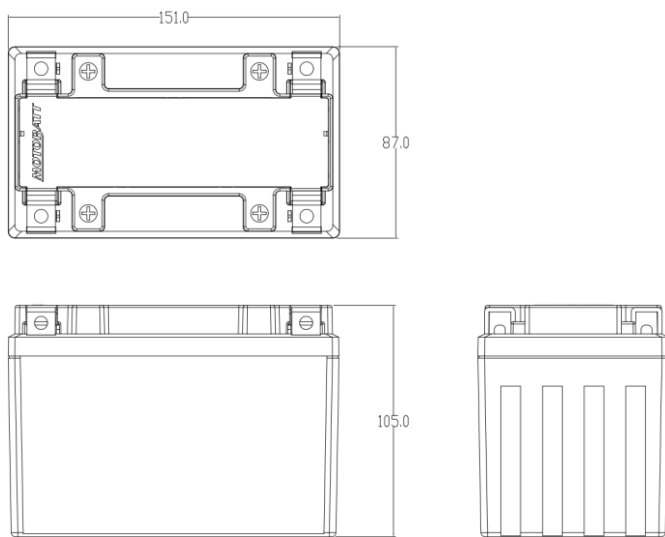

Length: 5.94in(151mm) Width: 3.43in(87mm)  
Height: 4.13in(105mm)

Tolerances are ±0.04 inches (±1mm) and ±0.08 inches (±2mm) for height.

#### Features

- Patented Quad Terminal Design-Reduce carrying costs
- 12V VRLA Hi Capacity Starting Battery
- Absorbed Glass Mat(AGM)technology
- Brass Terminals- superior conductivity
- US DOT, IATA certified non-spillable
- Highest AH Capacity in the Industry
- Factory Activated-ready to Install

#### Performance Specifications

Nominal Voltage	-----	12 volts(6cells)
Nominal Capacity 25°C(77°F)		
20-hr. (0.525A to 10.50 volts)	-----	11.1AH
10-hr. (1.05A to 10.50 volts)	-----	10.5AH
5-hr. (2.1A to 10.20 volts)	-----	8.61AH
1C. (10.5A to 9.60 volts)	-----	4.73AH
3C. (31.5A to 9.60 volts)	-----	3.8AH
Approximate Weight	-----	7.50lbs. (3.40kg)
Energy Density ( 20-hr rate )	-----	1.57W-h / in <sup>3</sup> ( 95.7W-h/1 )
Specific Energy ( 20-hr rate )	-----	18.16W-h / lb (40.0W-h/kg)
Internal Resistance ( approx )	-----	18 milliohms
CCA(-0 4°F/-18°C,7.2V,30S)	-----	160 amperes
CA(68°F/-20°C,7.2V,30S)	-----	219 amperes
Shelf Life (% of normal capacity at 68°F/20°C).....SOC% OCV		
1 months	-----	97% 12.78V
3 months	-----	91% 12.70V
6 months	-----	83% 12.5V
Operating Temperature Range		
Discharge	-----	-4°F(-20°C) to 122°F(50°C)
Charge	-----	-40°F(-40°C) to 140°F(60°C)
Case	-----	ABS
Warranty	-----	1 year




# MOTOBATT




## QuadFlex™ Battery


### Shelf life & Storage

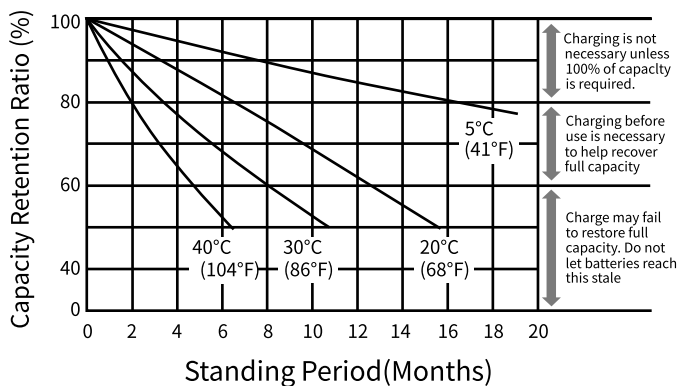


### Discharge Characteristics

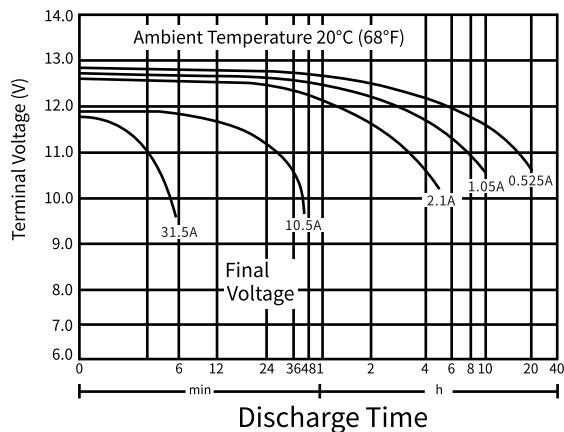

### Discharge Time vs. Discharge Current

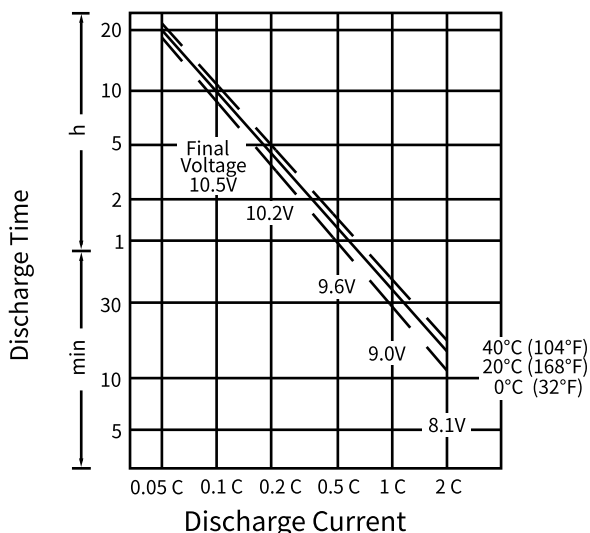

### Life Characteristics in Cyclic Use

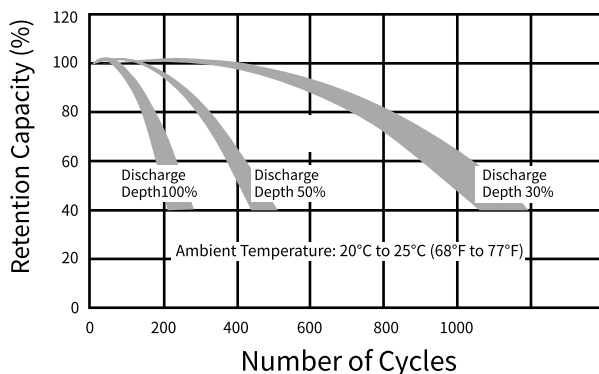

## Charging

**Cycle Applications:** Limit initial current to 0.2C. Charge until battery voltage (under charge) reaches 14.8 to 15.0 volts at 68°F (20°C). Hold at 14.8 to 15.0 volts until current drops to under 219 mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

## Chargers

MotoBatt offers a wide range of chargers suitable for batteries up to 2A. Please refer to the charger selection guide. Please contact our technical department for advice if you have difficulty in locating suitable models or contact us at [www.motobatt.com](http://www.motobatt.com)

## Can be used to replace

YTR9BS	YTX9	YTX9-BS	YT12A-BS

## Further information

Please refer to our website [www.motobatt.com](http://www.motobatt.com) to locate a distributor in your area.